





Minex WW

Electrical submersible drainage pump

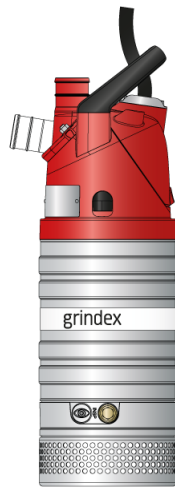

H(m)


0



0 Q (l/s)

P₁ (kW)

0



0 Q (l/s)

50 Hz	Lite 1-ph	1-ph	3-ph
Discharge connection	2"	2"	2"
Rated power P ₂ [kW]	0,85	1,4	1,2
Max. power consumption P ₁ [kW]	1,1	1,8	1,6
Shaft speed [r.p.m.]	2755	2870	2740
Rated current at 115V	11 A	-	-
Rated current at 230V	5,1 A	7,8 A	4,7 A
Rated current at 400V	-	-	2,6 A
Solids passage [mm]	7,5	7,5	7,5
Height [mm]	616	646	616
Diameter [mm]	200	200	200
Weight [kg]	21,5	25	21,5

Other voltages on request

ISO 9906/A

Classification

Electrical submersible drainage pump
Protection class: IP 68

Electrical motor

1-phase: Squirrel cage induction motor with start and run capacitor
3-phase: Squirrel cage induction motor
Insulation class: F (IEC 85)

Motor protection

1-phase: Temperature guard with a thermal contact in stator opening temperature 125°C (257°F), air valve
3-phase: Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator opening temperature 125°C (257°F) (= SMART system), air valve

Cable - SubCab

1-phase: 3G1,5mm², 20 m (66 ft) / 14AWG/3, 53 ft
3-phase: 4G1,5mm², 20 m (66 ft) / 14AWG/4, 53 ft

Limitations

Max. submersion depth: 20 m (66 ft)
Max. liquid temperature: 40 °C (104 °F)
Allowed pH range: 5 - 8
Maximum liquid density: 1100 kg/m³ (68 lbs/ft³)

Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment
Material lower seal: *silicon carbide - silicon carbide*
Material upper seal: *tungsten carbide - aluminium oxide*

Bearings

Ball bearings with C3 clearance

Discharge connection

2" hose, ISO-G or NPT

Materials

Casted parts: *Aluminium*
Outer casing: *Stainless steel*
Motor shaft: *Stainless steel*
Impeller: *Hard-Iron™*
Diffusers: *Nitrile rubber*
Screws and nuts: *Stainless steel*
O-rings: *Nitrile rubber*

Accessories

Float switch
Zinc anodes
Low suction collar
Pump raft

Specifications can be changed without notice