

## TOYO SUBMERSIBLE EXCAVATOR

# EPK (ELECTRIC DRIVE)

### FEATURE

- Electric driven excavator; easy installation, operation and maintenance. Variation of output from 7.5kW to 37kw.



OUTPUT	7.5~37kw
--------	----------


### SPECIFICATION

MODEL	BORE (mm)	MOTOR		REDUCTION RATIO	◇CUTTING BLADE		WEIGHT (kg)	CABTYRE CABLE LENGTH: 10m (Symbol x mm <sup>2</sup> x core)
		OUTPUT (kw)	POLE (P)		REVOLUTION (r/min)	RATED TORQUE (kgm)		
EPK-10K *	150	7.5	1	1/59	24.5	269	700	3PNCT×8 <sup>#</sup> ×4C
EPK-10K *	150	7.5	4	1/59	29.3	225	700	3PNCT×8 <sup>#</sup> ×4C
EPK-20 *	200	15	6	1/43	22.6	582	1700	3PNCT×14 <sup>#</sup> ×4C
EPK-20 *	200	15	6	1/43	27.1	486	1700	3PNCT×8 <sup>#</sup> ×4C
EPK-30 *	250	22	6	1/43	22.7	580	2700	3PNCT×38 <sup>#</sup> ×3C 3.5 <sup>#</sup> ×1C
EPK-30 *	250	22	6	1/43	27.2	710	2700	3PNCT×38 <sup>#</sup> ×3C 3.5 <sup>#</sup> ×1C
EPK-50 *	300	37	6	1/43	22.8	1424	5800	3PNCT×50 <sup>#</sup> ×3C 8 <sup>#</sup> ×1C
EPK-50 *	300	37	6	1/43	27.3	1189	5800	3PNCT×50 <sup>#</sup> ×3C · 8 <sup>#</sup> ×1C

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.
- ◇ Weight excludes the cutting blades.
- \* only 50Hz available.
- \* only 60Hz available.

### SIZE

MODEL	A	B	C
EPK-10K	1955	700	380
EPK-20	3005	800	700
EPK-30	3467	1200	760
EPK-50	4451	1500	1400

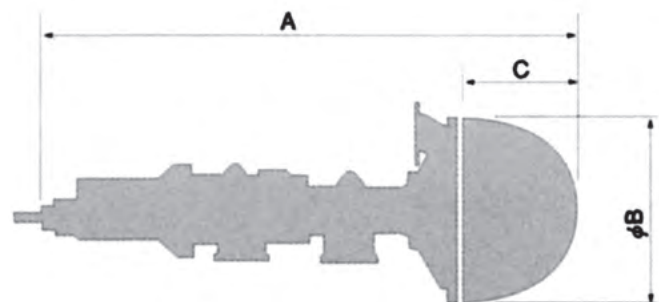

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.