



water solutions

Data sheet



DRX 50/2/G32V A0CM5

X

series

Technical specification

1~ 50 Hz

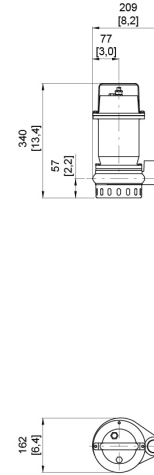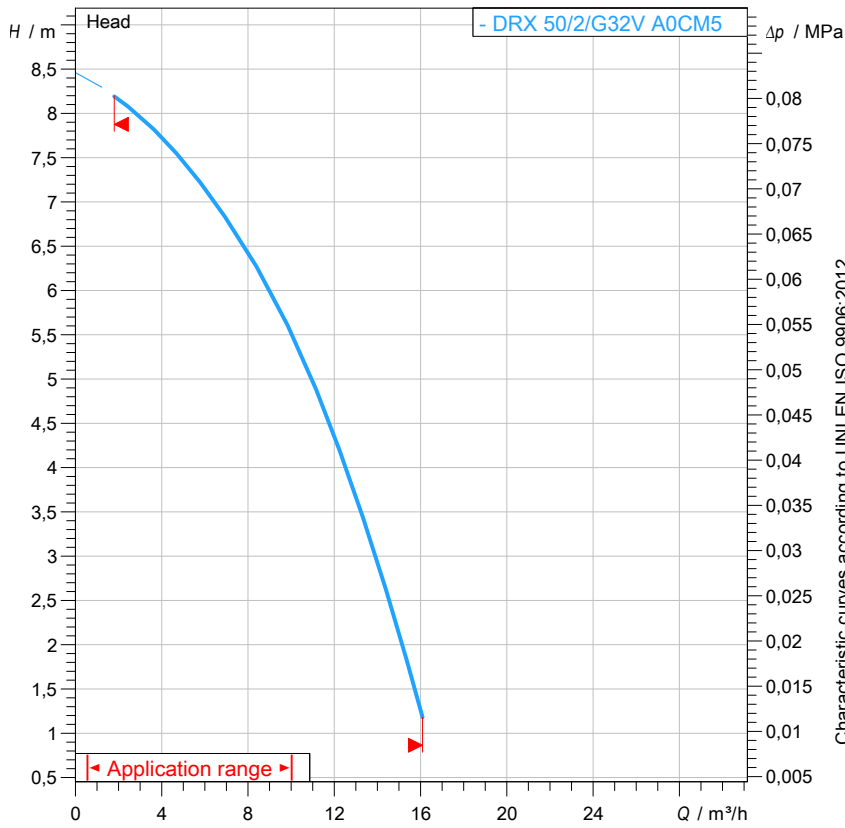

Pump

Series	X series
Pump name	DRX 50/2/G32V A0CM5
Configuration	NYTAQ51023N00NN
Standard	EN 809:2009

Motor data

Rated voltage	230 V
Frequency	50 Hz
Motor phases	1~
Number of poles	2
Rated power P2	0,37 kW
Incoming power P1	0,60 kW
Rated current	2,9 A
rpm	2820 1/min
Efficiency	60,8 %
cos φ	0,98
Rated torque	1,3 Nm
Start	
Degree of protection	IP 68
Insulation class	F

Hydraulic

Type	DR (Multi-channel open)
Free passage	15 mm
Impeller type	Multi channel impeller
Discharge	G 1" 1/4 -
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m ³
Max. immersion depth	20 m
pH treated liquid	3 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	AISI 316
Shaft	AISI 316
Hydraulic	AISI 316
Impeller	AISI 316
Screws	Stainless steel - Class A4-70
Gaskets	VITON
Strainer	AISI 316

Construction features

Main cable	4G1
Cable length	10 mt
Mechanical seals	2 in silicon carbide
Additional drilling	-
Weight*	17 kg
Electrical variant	Thermal protection

* cable's weight not included

Rev. 0 - 16-12-2014

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on: 2017-06-14

zenit.com

Page 1 / 3



water solutions


Data sheet DRX 50/2/G32V A0CM5

X series

Pump performance curves

1~ 50 Hz

Hydraulic type DR (Multi-channel open)		Impeller type Multi channel impeller		Free passage 15 mm	Discharge G 1" 1/4	Suction -
DUTY POINT						
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998,3 kg/m ³	Viscosity 1,005 mm ² /s	

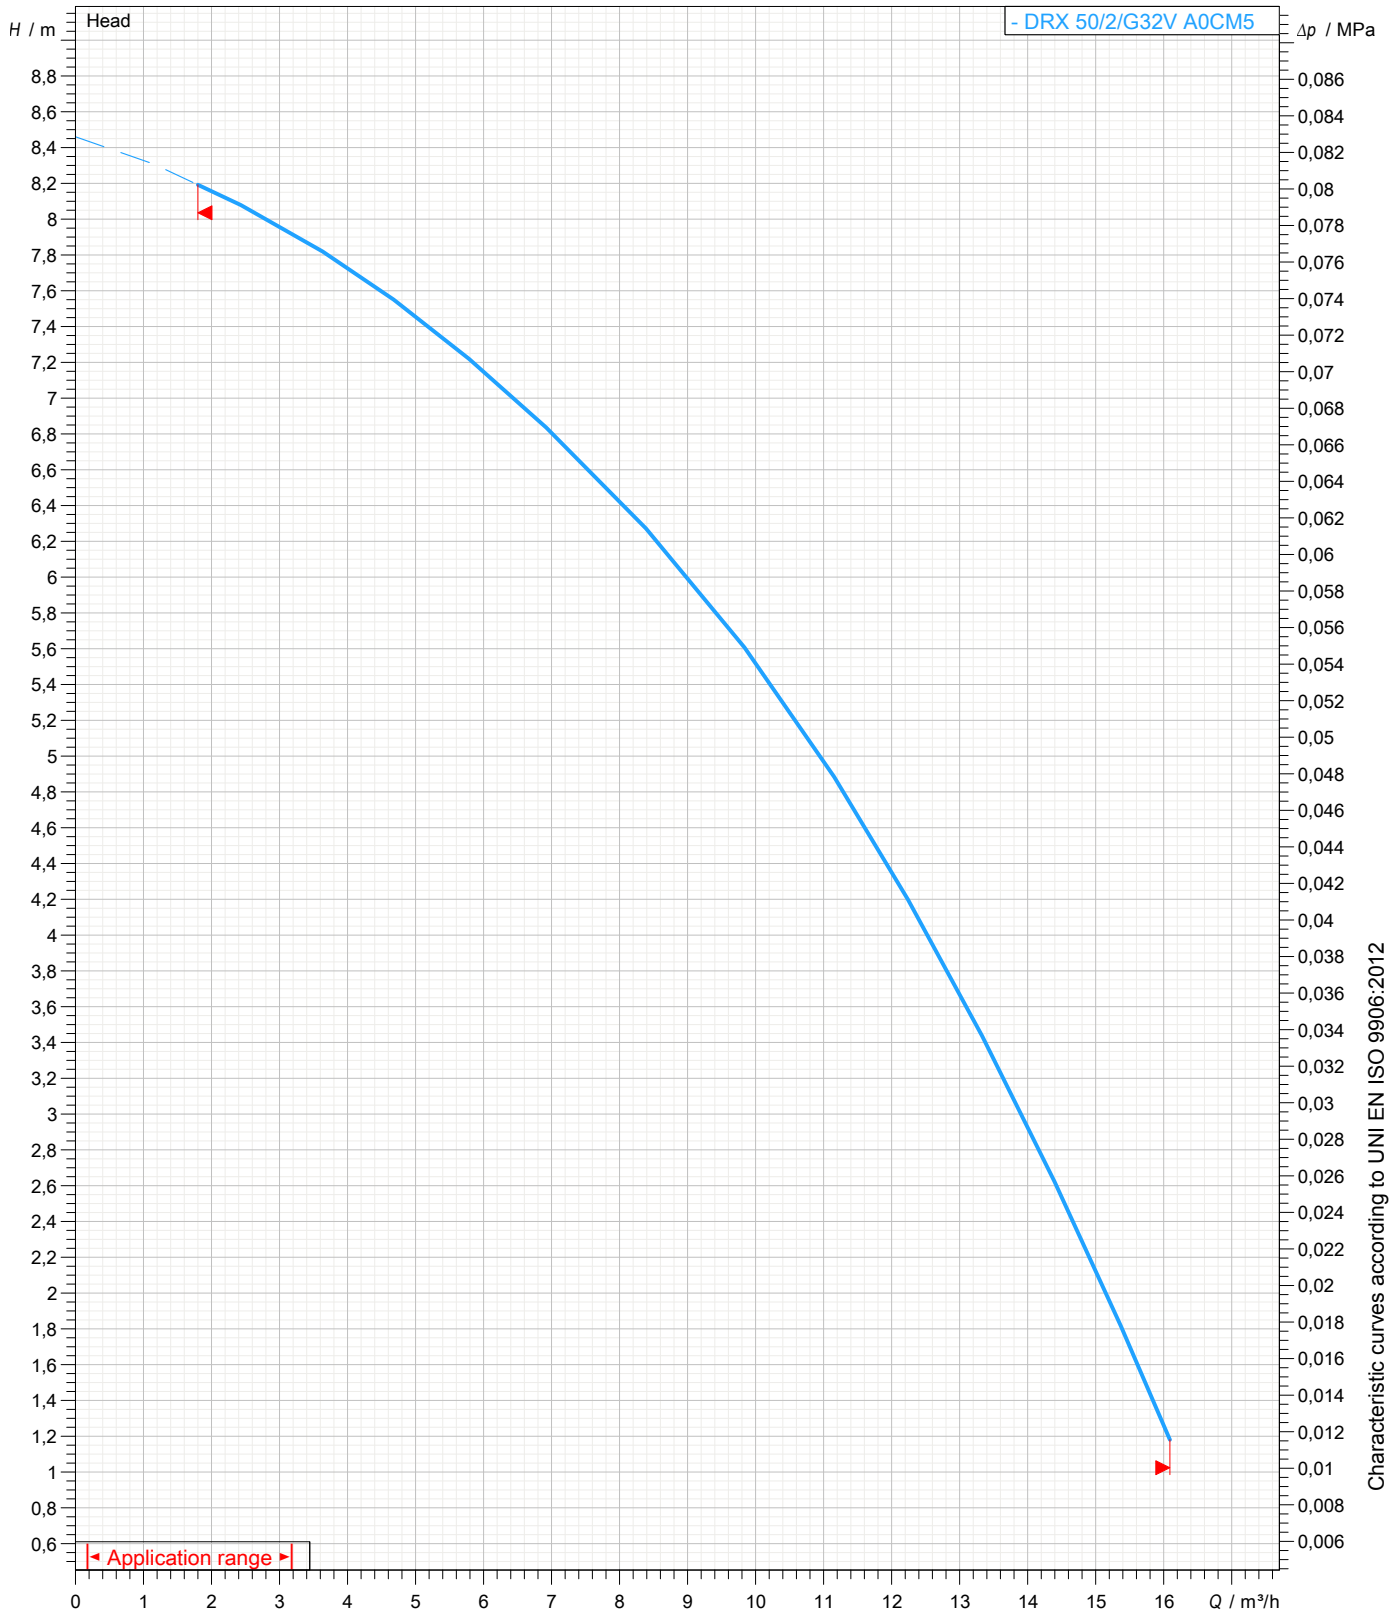



water solutions

Data sheet

DRX 50/2/G32V A0CM5

X
series

Dimensional drawing

1~ 50 Hz

Installation type Free Installation

WET/DRY use: WET



Discharge: G 1" 1/4 -

Pressure rating (suction/discharge): -

Accessory * : -

Accessory code * : -

* Accessory must be ordered separately

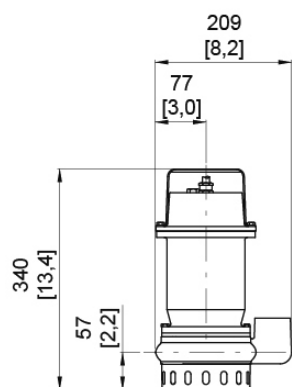

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

[mm]
[inch]

Created on: 2017-06-14

Page 3 / 3