

Submersible Grey Water Pump

AmaDrainer 3

50 Hz



Type Series Booklet



Legal information/Copyright

Type Series Booklet AmaDrainer 3

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB SE & Co. KGaA, Frankenthal 09/12/2021

Table of Contents

Building Services: Drainage.....	4
Drainage Pumps / Waste Water Pumps	4
AmaDrainer 3	4
Main applications.....	4
Fluids handled	4
Operating data.....	4
Design details	4
Designation	5
Materials.....	5
Product benefits.....	5
Product information	5
Overview of product features / selection tables	6
Technical data	7
Characteristic curves.....	8
Dimensions and connections	10
Spare parts.....	14
Scope of supply	14
Accessories.....	15
Exploded view and list of components.....	23

Building Services: Drainage

Drainage Pumps / Waste Water Pumps

AmaDrainer 3



301

303

322

354

Main applications

- Drainage
- Disposal
- Drainage systems
- Lowering groundwater levels
- Maintaining groundwater levels
- Draining of pits, shafts, etc.
- Surface drainage

Fluids handled

- Sizes 301, 303:
 - Solid particles with a particle size of up to 10 mm
- Size 322:
 - Solid particles with a particle size of up to 18 mm
- Size 354:
 - Solid particles with a particle size of up to 35 mm

Material variant A (standard variant)

- Slightly contaminated grey water (up to 70 °C max.)
- Wash water (up to 90 °C max. for short periods $t \leq 3$ minutes)
- Waste water without faeces
- Seepage water
- River water, lake water and groundwater

Material variant C (for aggressive fluids)

- Seawater (up to 20 °C max.)
- Brackish water
- Water containing salt (up to 20 °C max.)

Further information on fluids handled

Overview of fluids handled (⇒ Page 6)

Operating data

Table 1: Operating properties

Characteristic		Value
Flow rate	Q [m ³ /h]	≤ 13,5
	Q [l/s]	≤ 3,75
Head	H [m]	≤ 11,3
Fluid temperature	T [°C]	≤ +70 (continuous duty)
		≤ +90 (short-time duty)

Design details

Design

- Fully floodable submersible motor pump
- Close-coupled design
- Single-stage
- Wetted parts made of materials coated with anti-corrosive
- Maximum immersion depth: 2 m
- Sizes 301, 303, 322:
 - Integrated swing check valve
- Size 322:
 - Integrated pump sump cleaning option

Installation

- Vertical installation
- Wet-installed transportable model

Drive

- Jacket-cooled single-phase AC motor
- 230 V, 50 Hz
- Frequency of starts ≤ 30 starts/hour
- Integrated temperature switch
- Enclosure IP68 (permanently submerged) to EN 60529 / IEC 529
- Power cable incl. shockproof plug

Shaft seal

- Drive end, 1 shaft seal ring
- Pump-end, 1 shaft seal ring
- Grease reservoir between the seals for lubrication
- Grease-packed for life
- Maintenance-free

Bearings

- Rolling element bearings
- Grease-packed for life
- Maintenance-free

Automation

- Pump controlled via integrated float switch
- Pump controlled by external control unit

Designation

Example: AmaDrainer 301 C

Table 2: Designation key

Code	Description	
AmaDrainer 3	Type series	
0	Free passage [mm]	
	0	10 mm
	2	18 mm
	5	35 mm
1	Characteristic curve	
	1	Characteristic curve 301
	2	Characteristic curve 322
	3	Characteristic curve 303
	4	Characteristic curve 354
C	Material variant	
	C	Variant for aggressive fluids
	- ¹⁾	Standard variant

Materials

Table 3: Overview of available materials

Part No. (⇒ Page 23)	Description	Material variant A		Material variant C	
		301, 303	322, 354	301, 303	322, 354
101	Pump casing	Polypropylene, 30 % glass fibre reinforced			
107	Discharge casing	Polypropylene, 30 % glass fibre reinforced			
161	Casing cover	Polypropylene with 20 % talc (PP-TS 20)			
210	Shaft	AISI 431		Drive end: AISI 431 Pump end: AISI 316L	
230	Impeller	Noryl GNF2	Polyamide	Noryl GNF2	Polyamide
79-1	Automatic switchgear	Polypropylene			
811	Motor housing	AISI 304		AISI 316L	

Product benefits

- Space-saving design with the smallest possible dimensions
- Ready-to-connect, easy installation and commissioning
- Flexible use with and without external control unit by simply locking the float switch in continuously ON position.
- Maintenance-free with grease-packed bearings sealed for life
- Low-weight, corrosion-resistant, impact-resistant, abrasion-resistant, noise-dampening high-quality plastic housing with robust handle
- All sizes available in material variant for aggressive fluids
- Sizes 301, 303:
 - Integrated low water level intake option for residual water level as low as 2 mm
- Sizes 301, 303, 322:
 - Integrated swing check valve
- Size 322:
 - Integrated pump sump cleaning option

Product information

Product information as per Regulation No. 1907/2006 (REACH)

For information as per chemicals Regulation (EC) No. 1907/2006 (REACH), see <https://www.ksb.com/ksb-en/About-KSB/Corporate-responsibility/reach/> .

¹ Blank

Overview of product features / selection tables
Overview of fluids handled
Table 4: Symbols key

Symbol	Description
X	Standard
-	Version not available / not feasible

The table of fluids handled is a selection aid for different applications. It serves as guidance and is based on long-standing experience. The data are reference values and are not to be considered generally binding recommendations. They shall not be the basis for warranty claims. Please contact your nearest sales branch for in-depth advice.

Table 5: Table of fluids handled

Fluids handled	Material variant A	Material variant C
Antifrogen-water mixture	X	-
Cider	X	-
Beer	X	-
Spirits	X	-
Buttermilk	X	-
Calcium acetate	X	-
Calcium hydroxide	X	-
Deionised water	X	-
Peanut oil	X	-
Vinegar	-	X
Ethylene glycol	X	-
Liquid fertiliser	X	-
Antifreeze	X	-
Glycerine	X	-
Grisiron	X	-
Uric acid	X	-
Potassium hydroxide	X	-
Calcium carbonate	X	-
Coconut oil	X	-
Evaporated milk	X	-
Lemonades	X	-
Corn oil	X	-
Milk	X	-
Whey	X	-
Sodium carbonate	X	-
Sodium chloride up to 3 % concentration	-	X
Sodium hydrogen phosphate	X	-
Sodium nitrate	X	-
Sodium perborate	X	-
Sodium sulphate	X	-
Polyglycols	X	-
Rapeseed oil	X	-
Castor oil	X	-
Silicone oil	X	-
Silo leachate	-	X
Soybean oil	X	-
Edible vinegar	-	X
Edible oil	X	-
Trisodium phosphate	X	-
Vaseline	X	-
Washing machine lye	X	-
Water		
Drainage water	X	-
Fire-fighting water	X	-
Heating water	X	-
Lime water	-	X
Boiler water	X	-

Fluids handled	Material variant A	Material variant C
Condensate	-	X
Cooling water	X	-
Seawater	-	X ²⁾
Raw water	X	-
Swimming pool water (DIN 19643)	-	X
Salt water	-	X ²⁾
Partly desalinated water	X	-
Fully desalinated water	-	X

Technical data

AmaDrainer 3

Table 6: Technical data – 230 V, 50 Hz

Size	Discharge-side connection	Free passage [mm]	P ₁ [kW]	P _N [kW]	I _N 1~230 V [A]	Power cable H05RN8-F		Mat. No.	[kg]
						[m]	[mm ²]		
Material variant A (standard variant)									
301 ³⁾	Rp 1 1/4	10	0,43	0,25	1,90	10	3 × 0,75	48267549	4,2
303	Rp 1 1/4	10	0,90	0,60	4,00	10	3 × 0,75	48267550	5,5
322	Rp 1 1/4	18	0,70	0,40	3,50	10	3 × 0,75	48267551	5,5
354 ⁴⁾	G 1 1/2	35	0,90	0,60	4,00	10	3 × 0,75	48267552	5,6
Material variant C (for aggressive fluids)									
301 C ³⁾	Rp 1 1/4	10	0,43	0,25	1,90	10	3 × 0,75	48267553	4
303 C	Rp 1 1/4	10	0,90	0,60	4,00	10	3 × 0,75	48267554	5,5
322 C	Rp 1 1/4	18	0,70	0,40	3,50	10	3 × 0,75	48267555	5,5
354 C ⁴⁾	G 1 1/2	35	0,90	0,60	4,00	10	3 × 0,75	48267556	5,6


² Fluid temperature ≤ 20 °C

³ Discharge-side adapter, graded (Rp 1 1/4 to Rp 3/4 connection, DN 25 or DN 32), included in the scope of supply

⁴ 90° bend (cross-section 1 1/2 inches) for vertical discharge included in the scope of supply

Characteristic curves

AmaDrainer 301, 303, n = 2800 rpm

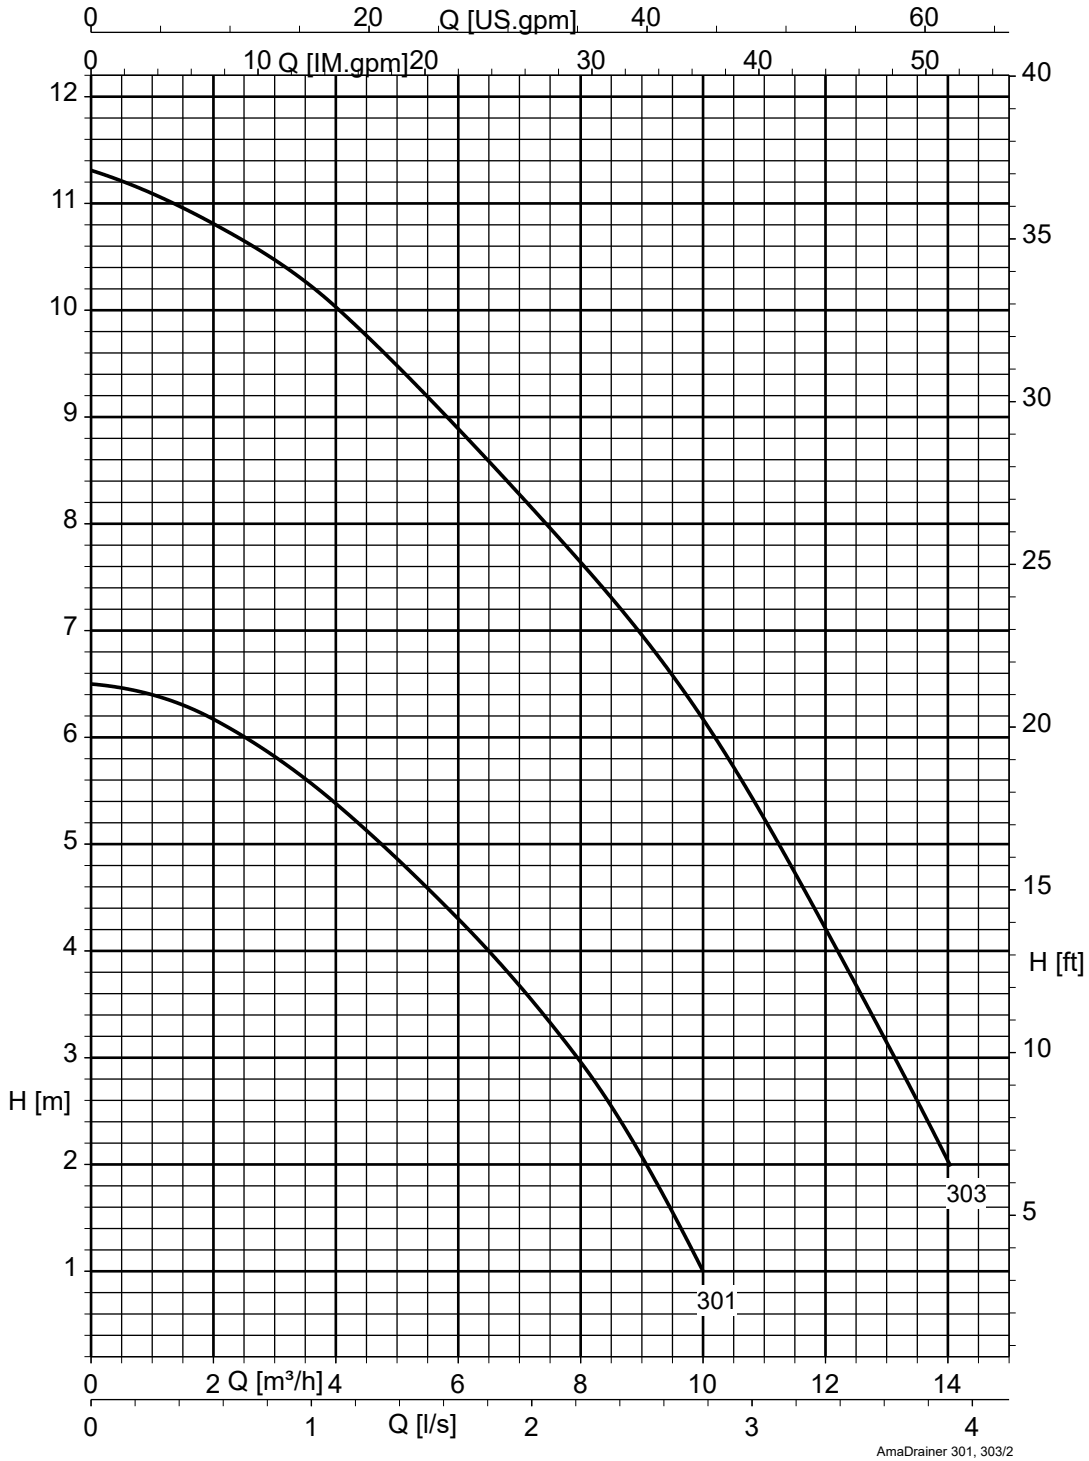


Sizes 301, 303: free passage = 10 mm

Performance tolerance to ISO 9906, Annex A (water under standard conditions)

2332.51/03-EN

AmaDrainer 322, 354, n = 2800 rpm

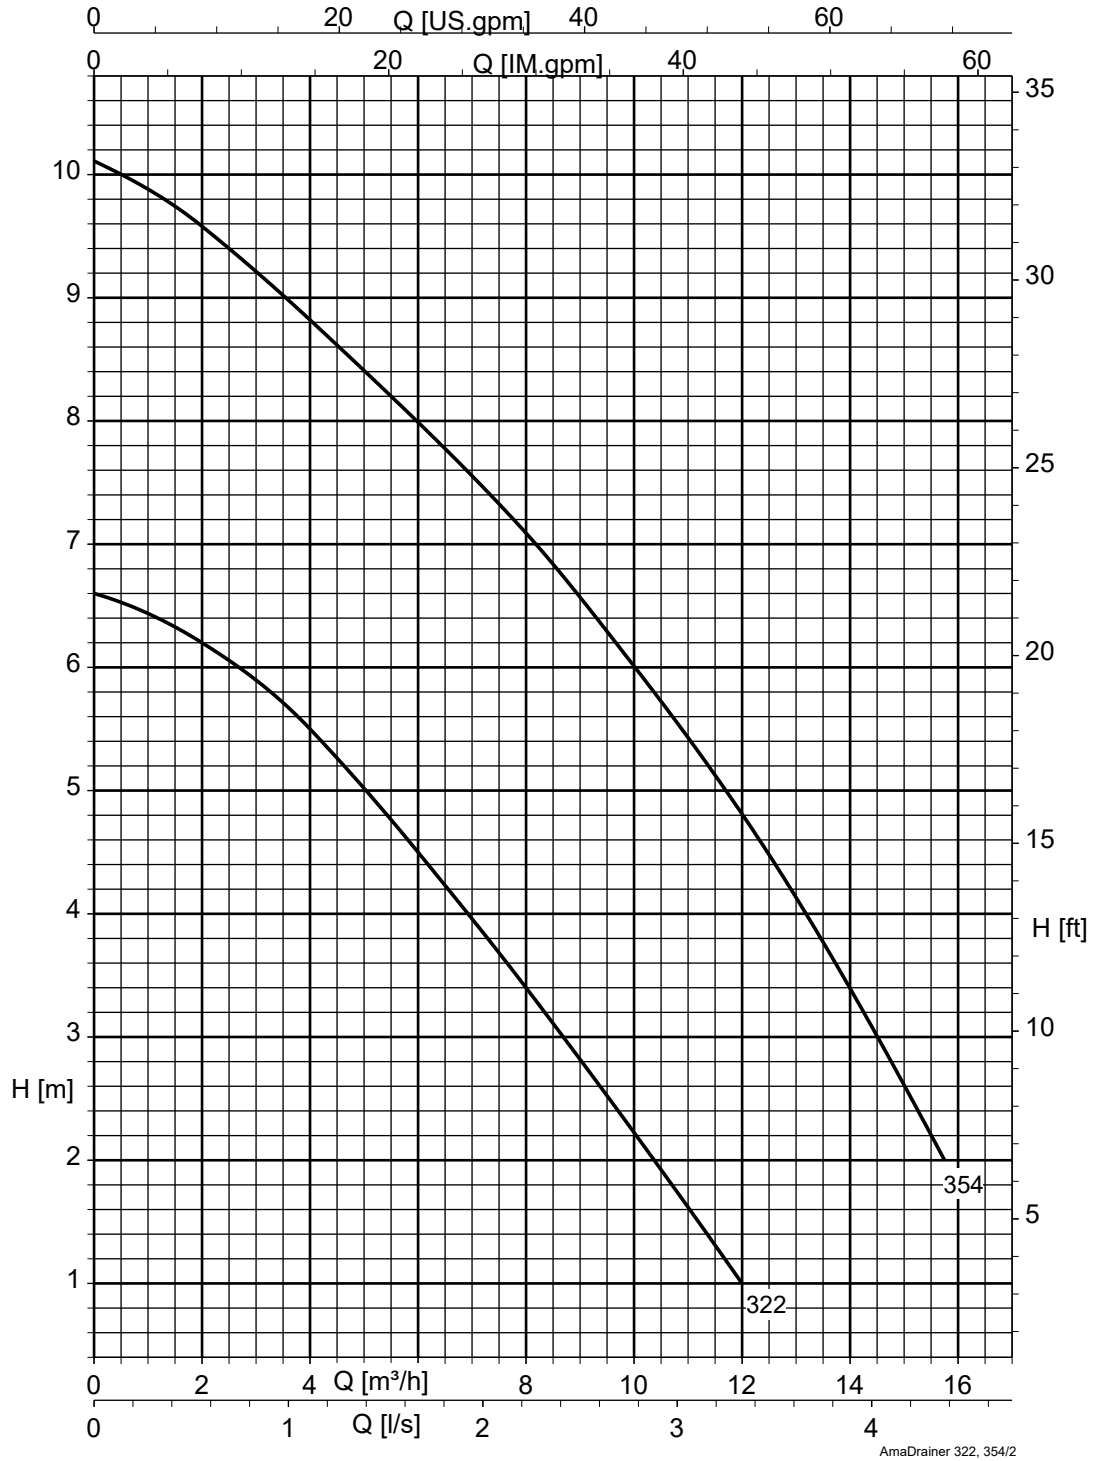

Size 322: free passage = 18 mm
 Size 354: free passage = 35 mm
 Performance tolerance to ISO 9906, Annex A (water under standard conditions)

2332.51/03-EN

Dimensions and connections

AmaDrainer 3

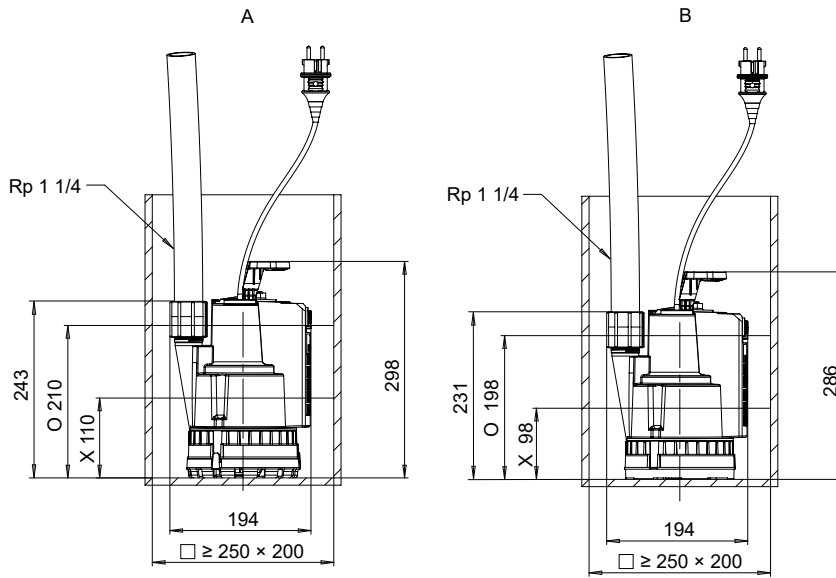


Fig. 1: Dimensions of AmaDrainer 301 [mm]

A	Standard installation
B	Installation for low water level intake, residual water level: 2 mm
O	Switching point ON
X	Switching point OFF
□	Minimum floor area required for installation in a tank or sump ⁵⁾

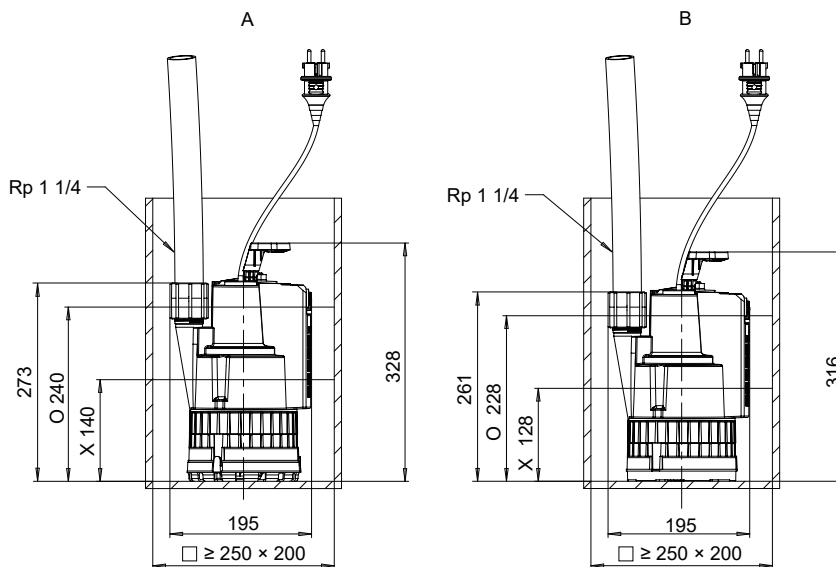


Fig. 2: Dimensions of AmaDrainer 303 [mm]

A	Standard installation
B	Installation for low water level intake, residual water level: 2 mm
O	Switching point ON
X	Switching point OFF
□	Minimum floor area required for installation in a tank or sump ⁵⁾

⁵⁾ When selecting the tank or sump take into account the pump set's maximum frequency of starts. If the frequency of starts would be too high, use a larger tank or sump if necessary.

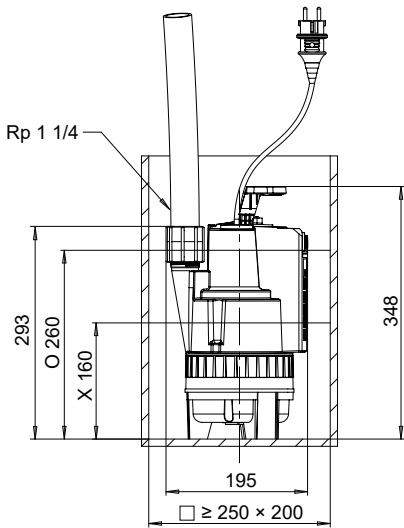


Fig. 3: Dimensions of AmaDrainer 322 [mm]

O	Switching point ON
X	Switching point OFF
□	Minimum floor area required for installation in a tank or sump ⁵⁾

i AmaDrainer 322: The pump foot is provided with cleaning openings for cleaning the pump sump. The pump is delivered with the cleaning openings closed. They can be drilled open if required (diameter: 4 mm).

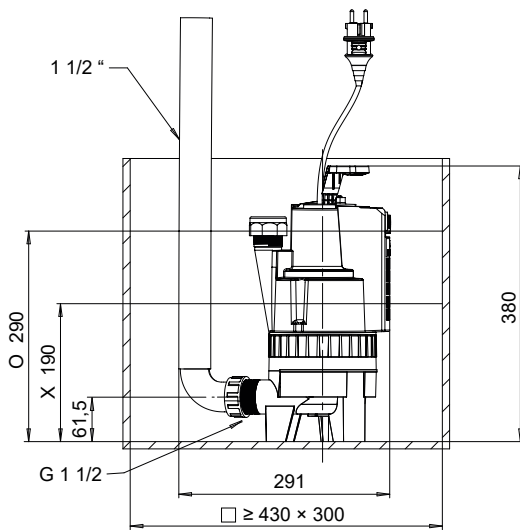


Fig. 4: Dimensions of AmaDrainer 354 [mm]

O	Switching point ON
X	Switching point OFF
□	Minimum floor area required for installation in a tank or sump ⁵⁾

Installation example of a dual-pump station

i The inlet is positioned above the highest float switch.

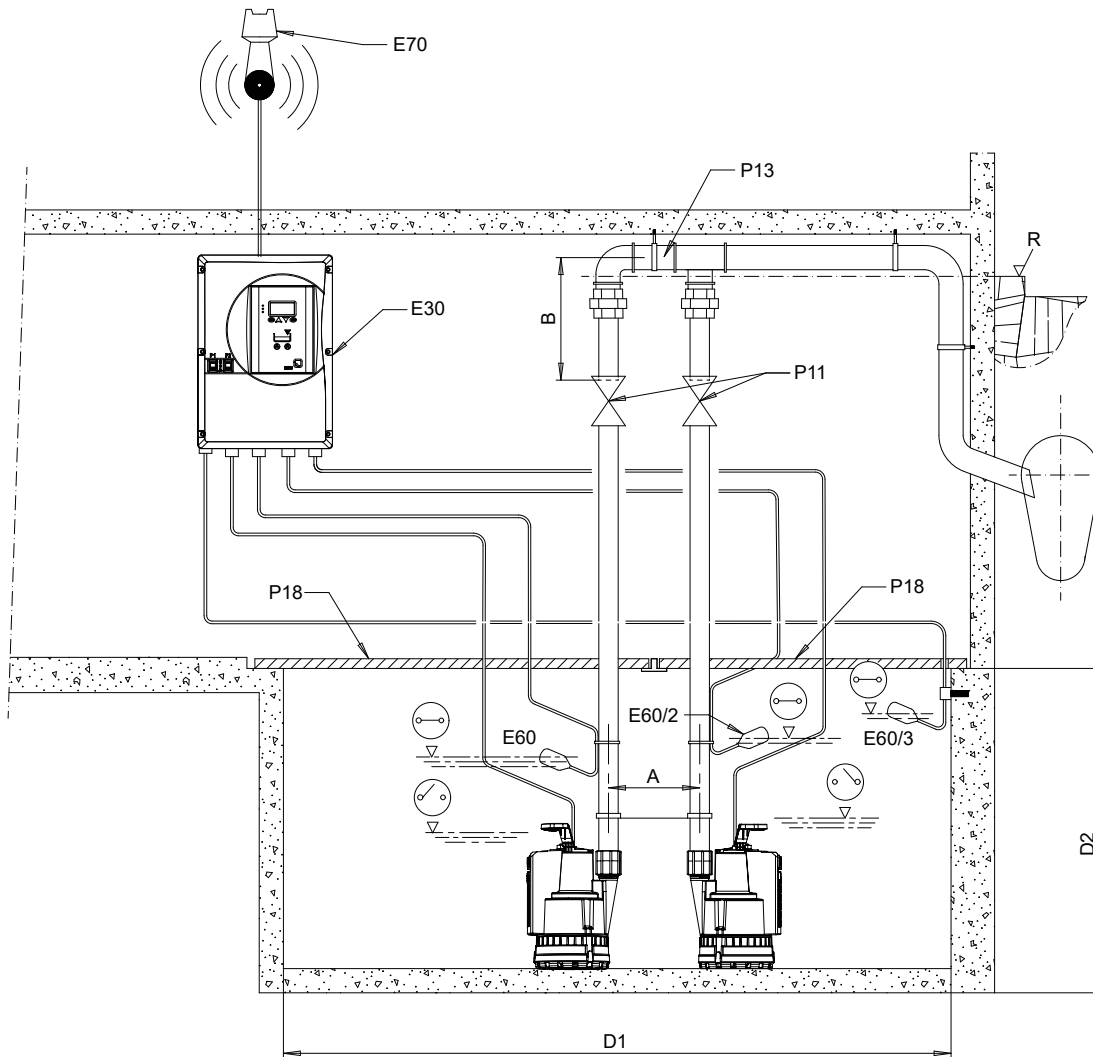


Fig. 5: Installation example of an AmaDrainer 301, 303, 322 dual-pump station

E30	Control unit
E60	Float switch, base load
E60/2	Float switch, peak load
E60/3	Float switch, high water alert
E70	Horn
P11	Shut-off valve
P13	Y-pipe
P18	Cover plate
R	Flood level

Table 7: Dimensions of an AmaDrainer 301, 303, 322 dual-pump station

Size	A	B	D1	D2
	[mm]	[mm]	[mm]	[mm]
301	275	320	1060 × 500	420
303	275	320	1060 × 500	450
322	275	320	1060 × 500	470

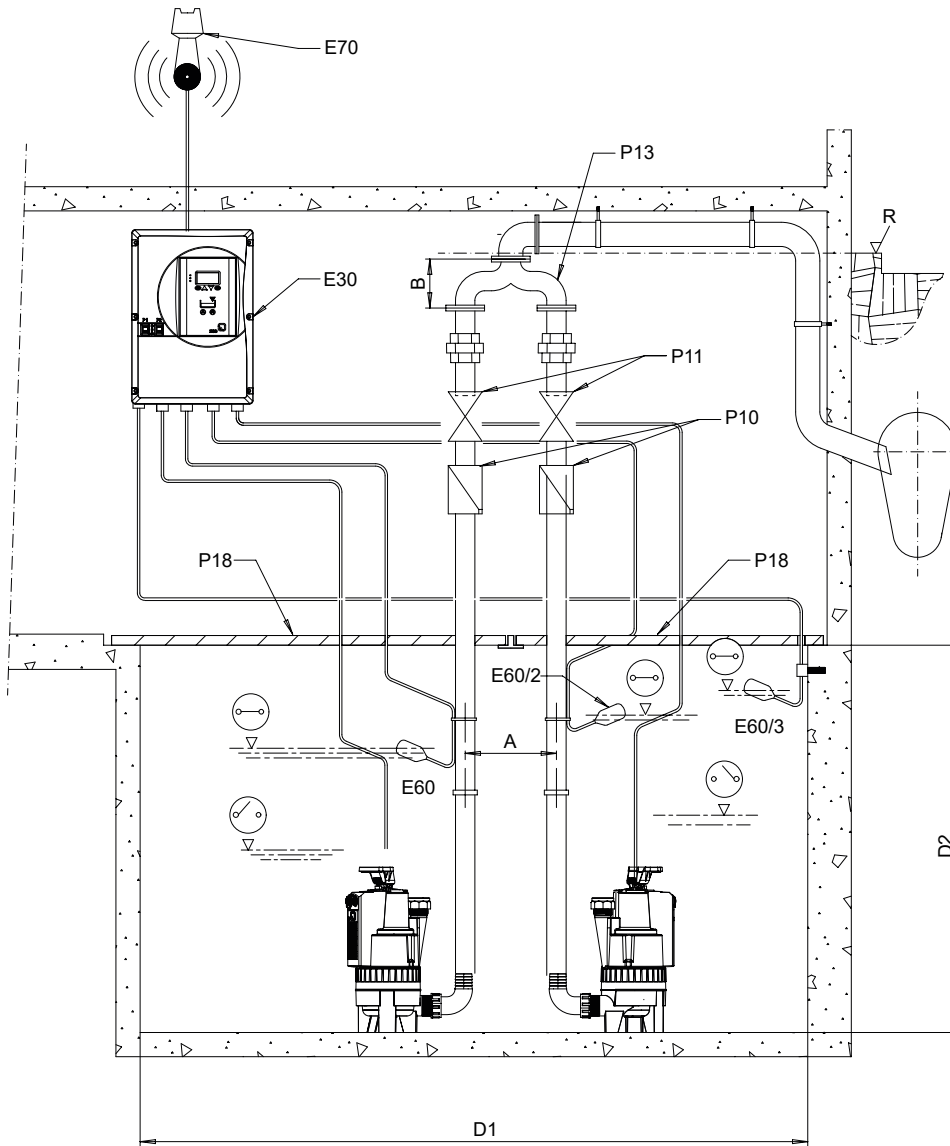


Fig. 6: Installation example of an AmaDrainer 354 dual-pump station




E30	Control unit
E60	Float switch, base load
E60/2	Float switch, peak load
E60/3	Float switch, high water alert
E70	Horn
P10	Lift check valve
P11	Shut-off valve
P13	Y-pipe
P18	Cover plate
R	Flood level

Table 8: Dimensions of an AmaDrainer 354 dual-pump station

Size	A	B	D1	D2
	[mm]	[mm]	[mm]	[mm]
354	275	180	1060 x 500	500

Spare parts

Table 9: Overview of spare parts

Part No.	Description	AmaDrainer				Mat. No.	[kg]
		301	303	322	354		
79-1 	Repair set for automatic switchgear	X	X	X	X	01833946	0,16
576 	Handle	X	X	X	X	01834007	0,05
748 	Suction strainer	X	X	-	-	01834008	0,08

Scope of supply




Depending on the model, the following items are included in the scope of supply:

- Pump set
- Installation/operating manual
- Size 301:
 - Discharge-side adapter, graded (connection Rp 1 1/4 to Rp 3/4, DN 25 or DN 32)
- Sizes 301, 303:
 - Removable suction strainer enabling low water level intake
- Sizes 301, 303, 322:
 - Integrated swing check valve
 - Barrel nipple with internal thread
- Size 322:
 - Integrated pump sump cleaning option
- Size 354:
 - 90° bend (cross-section 1 1/2 inches) for vertical discharge

Accessories
Pump accessories
Table 10: Pump accessories

Item	Description	Connection	AmaDrainer				Mat. No.	[kg]
			301	303	322	354		
P5 	Discharge-side adapter, graded For connecting various discharge lines (connections Rp 1 1/4 to Rp 3/4, DN 25 or DN 32)	Rp 1 1/4 to Rp 3/4, DN 25 or DN 32	- ⁶⁾	X	X	-	05086820	0,156
P10 	RK swing check valve Plastic, EN 12 050-4, with internal thread ISO 7/1, with full port and drain plug	Rp 1 1/4 Rp 1 1/2	X -	X -	X -	- X	01009771 01009772	0,1 0,25
P10 	Lift check valve, stainless steel (1.4401)	Rp 1 1/4 Rp 1 1/2	X -	X -	X -	- X	01084936 01084935	2,1 2,2
P11 	Socket gate valve Material: CuZn, PN 16, with internal thread, with full port	Rp 1 1/4 Rp 1 1/2	X -	X -	X -	- X	01014219 00411502	0,627 0,8
P13 	Y-pipe For dual-pump sets, with external thread, galvanised steel	Rp 1 1/4	X	X	X	-	18040311	4,1
P13 	Y-pipe For dual-pump sets, grey cast iron, with hexagon head bolts, nuts and gaskets; flanges drilled to DIN 2501	DN 40	-	-	-	X	40000688	10,6
P18 	Cover plate Tread-proof, split, with profile seals and angle iron mounting frame (type A 560) for 500 x 500 mm pits (For dual-pump stations with Y-pipe 2 cover plates are fitted next to each other.)	Rp 1 1/4	X	X	X	X	18075627	13
P21 	A 25 B drain hose set (see P32) Comprising: rigid coupling with external thread, 6 m plastic hose DN 25, rapid-action hose coupling Rp 1 1/4, (free passage 21 mm)	Rp 1 1/4	X	X	X	-	18079719	3
P24 	Storz rigid coupling with internal thread to DIN ISO 228/1 Aluminium alloy, required pipe part see P32 Can be combined with P28	C-G 1 1/2	X	X	X	X	01002463	0,3
P26 	Storz hose coupling Required counterpart see P24	C 52 (DIN 14321)	X	X	X	-	00524551	0,3
P28 	Plastic hose DN 40, with integrated C couplings, DIN 14811 Required pipe part see P32 Can be combined with P24	C 42-5 m C 42-10 m C 42-20 m	X X X	X X X	X X X	X X X	01062592 01062593 01062594	1,7 2,8 5

⁶⁾ Included in the scope of supply






Item	Description	Connection	AmaDrainer				Mat. No.	[kg]
			301	303	322	354		
P28 	Plastic hose DN 50, DIN 14811, with integrated C couplings Required pipe part see P32 Can be combined with P24	C 52-5 m	X	X	X	X	00522262	2,3
		C 52-10 m	X	X	X	X	00522263	4,2
		C 52-20 m	X	X	X	X	00522264	5,7
P29 	Threaded flange for Y-pipe (P13), internal thread	DN 40 / Rp 1 1/2	-	-	-	X	00260478	1,8
P32 	Pipe extension for Storz rigid coupling C (P24) PVC hard, internal/external thread For use without swing check valve and union nut	Internal thread Rp 1 1/4 / external thread R 1 1/2 x 170	X	X	X	-	11035587	0,2
P36 -	Replacement kit for AmaDrainer-Box Mini For replacing an Ama-Drainer N installed in AmaDrainer-Box Mini by an AmaDrainer 3 Comprising: installation parts and discharge line	-	X ⁷⁾	-	-	-	19066504	0,4

⁷⁾ Order the replacement kit in addition to the required AmaDrainer 3.

Control units and switchgear

Not valid for France.

Table 11: Control units and switchgear

Item	Description	1~230 V	Type	AmaDrainer				Mat. No.	[kg]
				301	303	322	354		
E 1 	MSE switchgear for Float switch With integrated motor protection relay, thermal motor protection, manual-0-automatic selector switch, operation and fault indicator lamps Dimensions (W x H x D) 100 x 170 x 112 mm	X	25.1	X	-	-	-	19070136	1
			40.1	-	X	X	X	19070137	1
E10 	LevelControl Basic 2 control unit for single-pump station, IP54 DOL starting, with manual-0-automatic selector switch, indicator lamps and control panel, high water alert, integrated alarm buzzer 85 dB(A), operating hours counter/start-stop cycles per pump, voltage measurement, phase monitoring, indication of water level, volt-free contact for general fault message, motor temperature warning (thermal circuit breaker) – self-acknowledging; motor leakage/moisture monitoring, optional mains-independent alarm via rechargeable battery (E90) For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	X	BC1 230 DFNO 100	X	X	X	X	19073760	4,5
E30 	LevelControl Basic 2 control unit for dual-pump station, IP54 Peak load operation, stand-by pump, DOL starting, with manual-0-automatic selector switch, indicator lamps and control panel, high water alert, integrated alarm buzzer 85 dB(A), operating hours counter/start-stop cycles per pump, pneumatic: indication of water level, voltage measurement, phase monitoring, volt-free contract for general fault message, 230 V variant: with external socket, 400 V variant: with motor protection switch, optional mains-independent alarm via rechargeable battery For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	X	BC2 230 DFNO 100	X	X	X	X	19073774	4,7
Optional components for LevelControl⁸⁾									
O1 	Master switch for LevelControl Basic 2 BC, fitted	-	-	X	X	X	X	01143084	0,2
O200 	Signalling module for LevelControl Basic 2 BC	-	-	X	X	X	X	19075182	0,2

⁸ Process optional components via KSB EasySelect, otherwise they might be supplied but not fitted.

LevelControl Basic 2 control units

Not valid for France.

Table 12: Symbols key

Symbol	Description
o	Optional
X	Available
-	Not available






Table 13: Overview of LevelControl Basic 2 control units

Feature	Single-pump station float switch or 4 - 20 mA sensor	Dual-pump station float switch or 4 - 20 mA sensor
230 V, up to 10.0 A	BC1 230 ^{DFNO} 100	BC2 230 ^{DFNO} 100
Functions		
Draining	X	X
Filling using float switch(es)	X	X
Stand-by pump: 1 pump redundant	-	X
Pump changeover after each start	-	X
Pump changeover in event of pump fault	-	X
Peak load operation function	-	X
Runtime limitation	X	X
OFF via after-run time	X	X
OFF via level	X	X
Functional check run after idle period	X	X
Alert history	X	X
Display and operation		
7-segment display	X	X
Indication of water level	Switching points	Switching points
Operation / fault / pump running (displayed for each pump)	Multicolour LED	Multicolour LED
General fault (traffic light)	LED	LED
High water	LED	LED
Mains voltage	X	X
Mains frequency	-	-
Motor current per pump	-	-
Operating hours of each pump	X	X
Operating hours of the system	-	-
Starts per pump	X	X
Effective power per pump	-	-
Phase monitoring	X	X
Change of switching levels via control panel	X	X
Housing H x W x D [mm], IP54		
Plastic 400 x 281 x 135	X	X
Sheet steel 400 x 300 x 155	-	-
Sheet steel 600 x 400 x 200	-	-
Built-in components		
Master switch (lockable)	o	o
Manual-0-automatic selector switch per pump	X	X
DOL starting	X	X
Star-delta starting	-	-
Shockproof socket 230 V	X	X
Motor protection		
Fuse per pump	X	X
Motor protection switch per pump (overcurrent protection and short-circuit protection)	-	-
Motor temperature warning input	X	X
Motor temperature alert input	X	X
Pump		
Thermal circuit breaker (TCB) / bimetal switch per pump	Bimetal switch in the motor	Bimetal switch in the motor
Optional components		










Feature	Single-pump station float switch or 4 - 20 mA sensor	Dual-pump station float switch or 4 - 20 mA sensor
Rechargeable battery for powering the device	o	o
Alarm equipment		
1 free alarm input	x	x
1 digital input for high water alert	x	x
Volt-free contact (changeover contact) for general fault message / "in operation" message	x	x
Piezo buzzer 85 dB(A)	x	x
Horn / alarm combination / alarm strobe light 12 V DC	o	o
Inputs/outputs		
Inputs for float switches	4	4
4 - 20 mA analog input	x	x
Integrated pneumatic pressure sensor up to 3 metres of water (up to 10 metres on request)	-	-
Bubbler control with compressor up to 2 metres of water	-	-
Remote acknowledgement	x	x
12 V DC connection for horn, etc.	x	x
Sensor equipment		
Float switch (NO contact)	o	o
F1 leakage sensor	o	o
Tools		
KSB ServiceTool	o	o

Alarm switchgears for pumps, non-ATEX-compliant

Table 14: AS 0/AS 1/AS 2/AS 4/AS 5




Item	Description	Mat. No.	[kg]
E50	 <p>Alarm switchgear AS 0 With circuit breaker, acoustic signal transmitter with 85 dB(A), green equipment-on lamp Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch, F1 leakage sensor (item E64), M1 alarm contactor or signal relay of control unit as contactor.</p>	29128401	0,5
E51	 <p>Alarm switchgear AS 2 With circuit breaker, acoustic signalling device with 85 dB(A), green equipment-on lamp, volt-free contact for hook-up to a control station Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch, F1 leakage sensor (item E64) or signal relay of control unit as contactor.</p>	29128422	0,5
E52	 <p>Alarm switchgear AS 4 With circuit breaker, acoustic signal transmitter with 85 dB(A), green equipment-on lamp, volt-free contact for hook-up to a control station, self-charging power supply unit for 5 hours of operation in the event of a power failure Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch (E60), F1 leakage sensor (item E64) or signal relay of control unit as contactor.</p>	29128442	0,5
E53	 <p>Alarm switchgear AS 5 Mains-independent, with self-charging power supply unit for 10 hours of operation in the event of a power failure, mains pilot LED, fault indicator light, acknowledgement button, volt-free contact for hook-up to a control station, ready for connection with 1.8 m power cable and plug. ISO housing, IP41, H x W x D = 190 x 165 x 75 [mm]. Use float switch (E60) or signal relay of control unit as contactor.</p>	00530561	1,7
E55	 <p>Alarm switchgear AS 1 In IP30 ISO plug housing, mains-independent, with self-charging power supply unit for 5 hours of operation in the event of a power failure, acoustic signal transmitter 70 dB(A) with circuit breaker and integrated signal transmitter with 3-meter power cable, max. 60 °C, not suitable for steam and condensate.</p> <ol style="list-style-type: none"> 1. High water alert by suspending the sensor in a (pump) sump above the pump start-up point. 2. Water alarm signal at a water level of only 1 mm, by placing the sensor on the floor in areas with a flooding or leakage risk, e.g. the cellar or next to the washing machine in the kitchen or bathroom. 	00533740	0,9

Control unit / switchgear accessories
Table 15: Control unit / switchgear accessories

Item	Description	Length of cable / hose [m]	AmaDrainer				Mat. No.	[kg]
			301	303	322	354		
 E60 Float switch with free cable end Function: circuit closed in upper float position (NO contact) Float switch housing: polypropylene Fluid temperature: 70 °C max. Power cable: H07RN-F3G1	3	X	X	X	X	11037742	0,5	
	5	X	X	X	X	11037743	0,8	
	10	X	X	X	X	11037744	1,3	
	15	X	X	X	X	11037745	1,8	
	20	X	X	X	X	11037746	2,4	
	25	X	X	X	X	11037747	2,9	
	30	X	X	X	X	11037748	3,4	
 E60.1 Float switch with shockproof plug Function: circuit closed in upper float position (NO contact) Float switch housing: polypropylene Fluid temperature: 70 °C max. Power cable: H07RN-F3G1	3	X	X	X	X	11037749	1,1	
	5	X	X	X	X	11037750	1,3	
	10	X	X	X	X	11037751	1,6	
 E61 Float switch with free cable end, oil-resistant Function: circuit closed in upper float position (NO contact) Float switch housing: polypropylene Fluid temperature: 70 °C max. Power cable: PUR 3x1.0 mm ²	5	X	X	X	X	11037753	0,8	
	10	X	X	X	X	11037754	1,2	
	20	X	X	X	X	11037755	2	
 E62 Float switch with free cable end ⁹⁾ Function: circuit open in upper float position (NC contact) Float switch housing: polypropylene Fluid temperature: 70 °C max. Power cable: H07RN-F3G1	5	X	X	X	X	11037756	0,8	
	10	X	X	X	X	11037757	1,4	
	20	X	X	X	X	11037758	2,6	
 E64 F1 leakage sensor Contactor for alarm switchgears AS 0, AS 2, AS 4 or as alarm transmitter for LevelControl Basic 2 Alarm transmission options: High water alert by suspending the sensor in a (pump) sump above the pump start-up point. Warning at a water level of 1 mm in areas with a flooding or leakage risk (e.g. in the cellar or next to the washing machine in the kitchen or bathroom) Dimensions [mm]: 52 x 21 x 20 (H x W x D)	3 m	X	X	X	X	19072366	0,2	
 E70 Horn, 12 V DC, 105 dB, 150 mA, IP54 Suitable for indoor installation and outdoor installation. Protect against moisture.	-	X	X	X	X	01086547	0,1	
 E71 Alarm combination, 12 V DC	-	X	X	X	X	01139930	0,1	
 E72 Yellow alarm strobe light, 12 V DC, 195 mA, IP65	-	X	X	X	X	01056355	0,3	
 O45 Plastic housing, IP65, for easier installation of alarm strobe light, for wall mounting	-	X	X	X	X	01061067	0,2	

2332.51/03-EN

⁹ Not suitable for LevelControl Basic 2.

Item	Description	Length of cable / hose [m]	AmaDrainer				Mat. No.	[kg]
			301	303	322	354		
E73 	KSB ServiceTool	-	X	X	X	X	47121210	0,2
E80 	Safety switch STECKMAT trips in approx. 0.03 seconds, from approx. 0.03 A 230 V / 10 A	-	X	X	X	X	00534217	0,5
E90 	Rechargeable battery retrofit kit for LevelControl Basic 2, type BC Scope of supply: 2 rechargeable batteries (6 V, 1.3 Ah) and charge controller	-	X	X	X	X	19074194	0,8

Exploded view and list of components

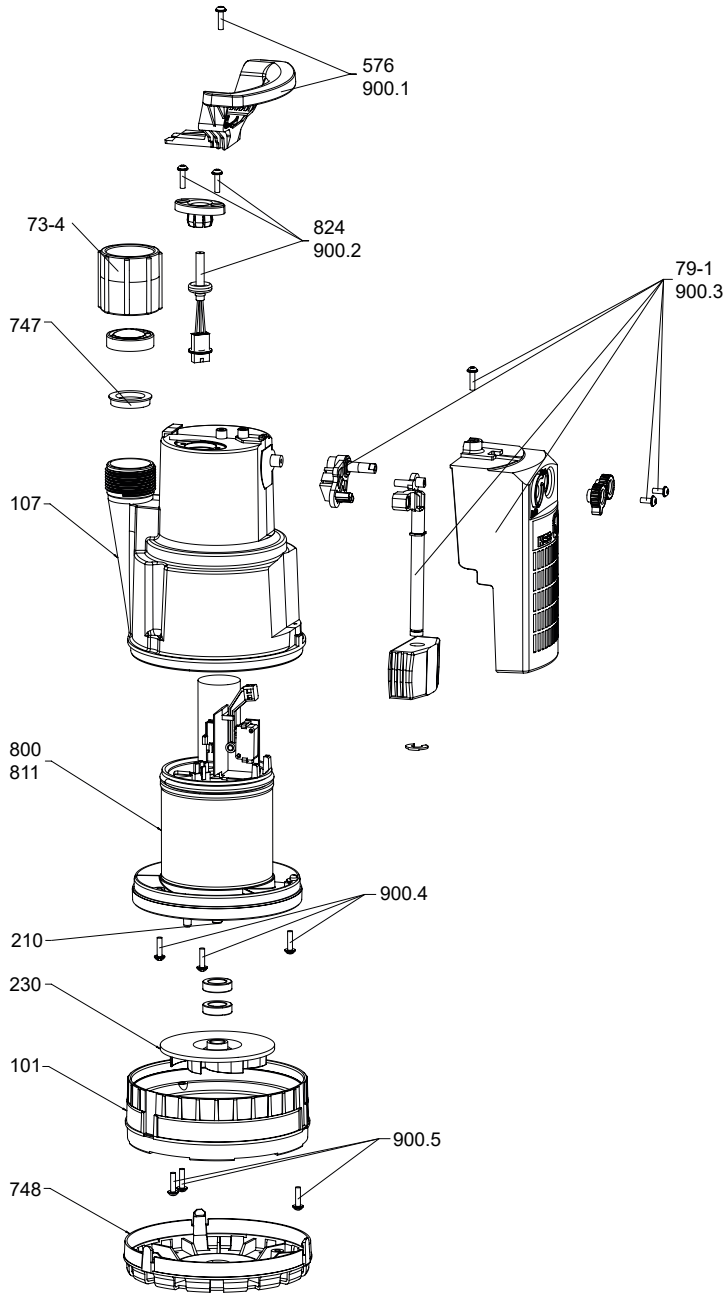


Fig. 7: Exploded view of AmaDrainer 301, 303

Table 16: List of components of AmaDrainer 301, 303

Part No.	Description	Part No.	Description
101	Pump casing	747	Swing check valve
107	Discharge casing	748	Suction strainer
210	Shaft	800	Motor
230	Impeller	811	Motor housing
576	Handle	824	Power cable
74-3	Barrel nipple	900.1/.2/.3/.4/.5	Bolt/screw
79-1	Automatic switchgear, external		

2332.51/03-EN

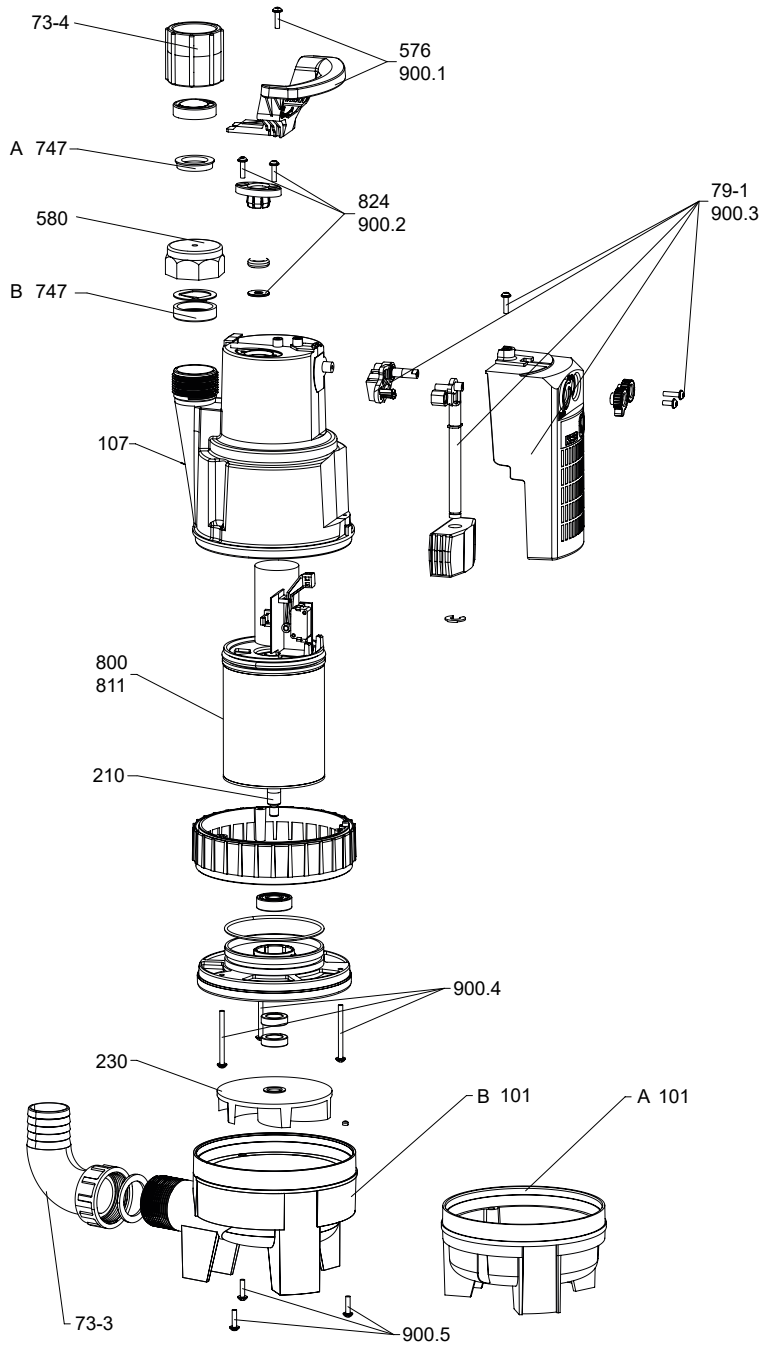


Fig. 8: Exploded view of AmaDrainer 322, 354

A	AmaDrainer 322	B	AmaDrainer 354
---	----------------	---	----------------

Table 17: List of components of AmaDrainer 322, 354

Part No.	Description	Part No.	Description
101	Pump casing	74-3	Barrel nipple
107	Discharge casing	79-1	Automatic switchgear, external
210	Shaft	747	Swing check valve ¹⁰
230	Impeller	800	Motor
576	Handle	811	Motor housing
580	Cap	824	Power cable
73-3	Hose connection (90° bend)	900.1/.2/.3/.4/.5	Bolt/screw

¹⁰ On AmaDrainer 354 the swing check valve is mounted upside down (opening downwards) to enable venting of the pump casing.



KSB SE & Co. KGaA
Johann-Klein-Straße 9 • 67227 Frankenthal (Germany)
Tel. +49 6233 86-0
www.ksb.com