


Series description: Wilo-HiSewlift 3

Wilo HiSewlift 3-35

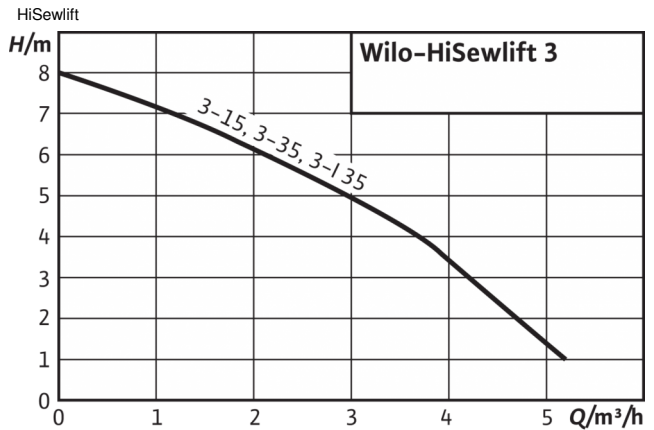

Design type

Small sewage lifting unit with macerator

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be piped to the sewer system through the use of natural falls.

Equipment/function

- Ready-to-plug
- Thermal motor protection
- Level checking via a pneumatic pressure transducer
- Integrated non-return valve
- Fixation material
- Active carbon filter

Scope of delivery

- Ready for connection sewage lifting unit with macerator, active carbon filter and integrated non-return valves
- Installation and operating instructions
- Connection set for inlet and pressure pipes

Type key

Example:	HiSewlift 3-35
HiSewlift	Product family: Sewage lifting unit
3	Product level
	3 = Standard
1	Front-wall installation:
	1 = can be installed behind a front wall
3	Number of inlet connections (in addition to the toilet connection)
5	Rated delivery head in m

Technical data

- Mains connection 1~230 V, 50 Hz
- Mains connection cable 1.5 m, with shock-proof plug
- Fluid temperature max. 35 °C
- Pressure connection DN 32
- Inlet connection DN 40
- Protection class IP 44
- Gross tank volume 14.4 l / 17.4 l / 17.4 l
- Switching volume 1 l

Materials

- Pump housing: PPGF30
- Motor housing: PPGF30
- Gasket: EPDM
- Tank material: PP


Description/construction

Automatically operating small lifting unit with macerator, built-in non-return valve, active carbon filter, flexible pressure port and connection options for one toilet, as well as two or three additional drainage fixtures (depending on the model). Odour-free exhaust ventilation into the installation room is implemented by means of an integrated active carbon filter.

Special features/product advantages

- HiSewlift 3-135 in particularly narrow version (less than 149 mm width) for a simple front-wall installation
- Low-noise operation and installed active carbon filter for high user comfort
- Reliable capacity and low electricity consumption for efficient sewage disposal
- Simple installation with flexible connection options
- Ready for connection

Duty chart: Wilo-HiSewlift 3

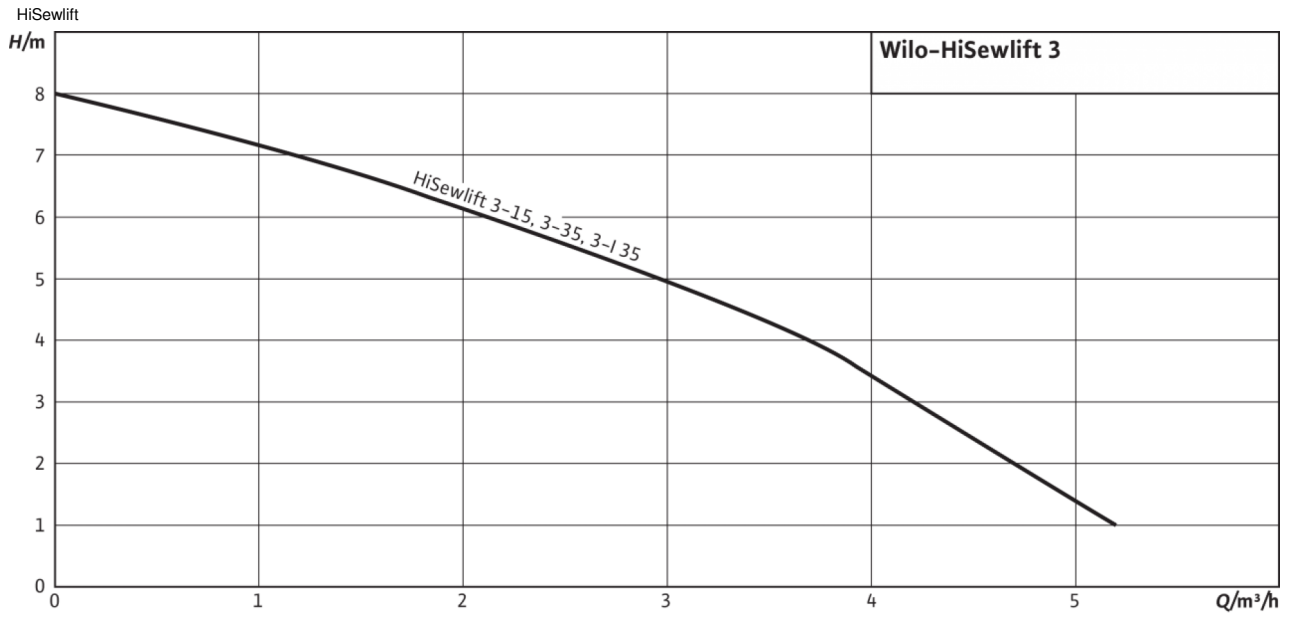



Product list: Wilo-HiSewlift 3

Product description	Article number
HiSewlift 3-35	4191677
HiSewlift 3-15	4191675
HiSewlift 3-135	4191674