

PRODUCT SPECIFICATIONS EVMS(.).1-3-5-10-15-20


		PUMP																		
Version		EVMSG						EVMS						EVMSL						
Operating range	Nominal flow rate (m ³ /h)	1	3	5	10	15	20	1	3	5	10	15	20	1	3	5	10	15	20	
		Maximum working pressure	1.6 / 2.5 MPa (16 bar/ 25 bar)																	
		Liquid temperature range	-30°C to 140°C																	
Key Components Material	Impeller	EN 1.4301 (AISI 304)						EN 1.4401 (AISI 316)												
	Intermediate casing	EN 1.4301 (AISI 304)						EN 1.4401 (AISI 316)												
	Liner ring	EN 1.4301 (AISI 304) + PPS						EN 1.4401 (AISI 316) + PPS												
	Bottom casing	Cast Iron			EN 1.4301 (AISI 304)			EN 1.4401 (AISI 316)												
	Casing cover	EN 1.4301 (AISI 304)						EN 1.4401 (AISI 316)												
	Shaft	EN 1.4301 (AISI 304)	EVMSG / EVMS 1-3-10 , EVMSG / EVMS 5-15-20 (depend on models)																	
		EN 1.4404 (AISI 316L)	EVMSL 1-3-10 , EVMSL 5-15-20 (depend on models)																	
		EN 1.4462 (AISI 329A)	EVMSG / EVMS / EVMSL 5-15-20 (depend on models)																	
	Shaft sleeve bearing	Tungsten carbide																		
	Shaft Seal	See the shaft seal options																		
	O-ring	EPDM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		FPM	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Outer casing	EN 1.4301 (AISI 304)						EN 1.4404 (AISI 316L)												
	Motor Bracket	Cast Iron																		
	Tie rod	Galvanized steel 6.8 strength class ISO 898/1																		
Coupling	up to 4 kW	Die cast aluminium																		
	from 5.5 kW	Cast Iron																		
Base		Cast Iron						Die cast aluminium												
Pipe connection	Oval flange	up to 16 bar	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Round flange (DIN)	up to 16 bar	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		from 16 bar to 25 bar	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Loose round flange (DIN)	up to 16 bar							○	○	○	○	○	○	○	○	○	○	○	○
		from 16 bar to 25 bar							○	○	○	○	○	○	○	○	○	○	○	○
Victaulic	up to 16/25 bar							○	○	○	○	○	○	○	○	○	○	○	○	
Clamp	up to 16/25 bar							○	○	○	○	○	○	○	○	○	○	○	○	

Legend: ● Standard ○ Options

		MOTOR		
Power Source	Frequency	50 Hz		
	Phase	Single Phase	Three Phase	
	Rotation speed	≈ 2900 min-1		
	Power rating	0.37 + 2.2 kW	0.37 + 18.5 kW	
		0.5 + 3.0 HP	0.5 + 25 HP	
Voltage	230 ± 10% V	230/400 ± 10% V (up to 4kW) 400/690 ± 10% V (above 5.5 kW)		
Type	Type	Electric - TEFC		
	Efficiency Level	from 0.37 to 2.2 kW	- from 0.37 to 0.55 kW IE3 from 0.75 to 18.5 kW	
	No' of poles	2		
	Protection degree	IP 55		
	Insulation Class	F (temperature rise class B)		
Others	Thermal Protection	PTC is available for the above 1.5 kW		
	Casing Material	Aluminium		
	Flange mount (IEC motor)	IM B14 (up to 4 kW) IM B5 (above 5.5 kW)		

PERFORMANCE CURVE
EVMS(L)5


EVMS(L) 5

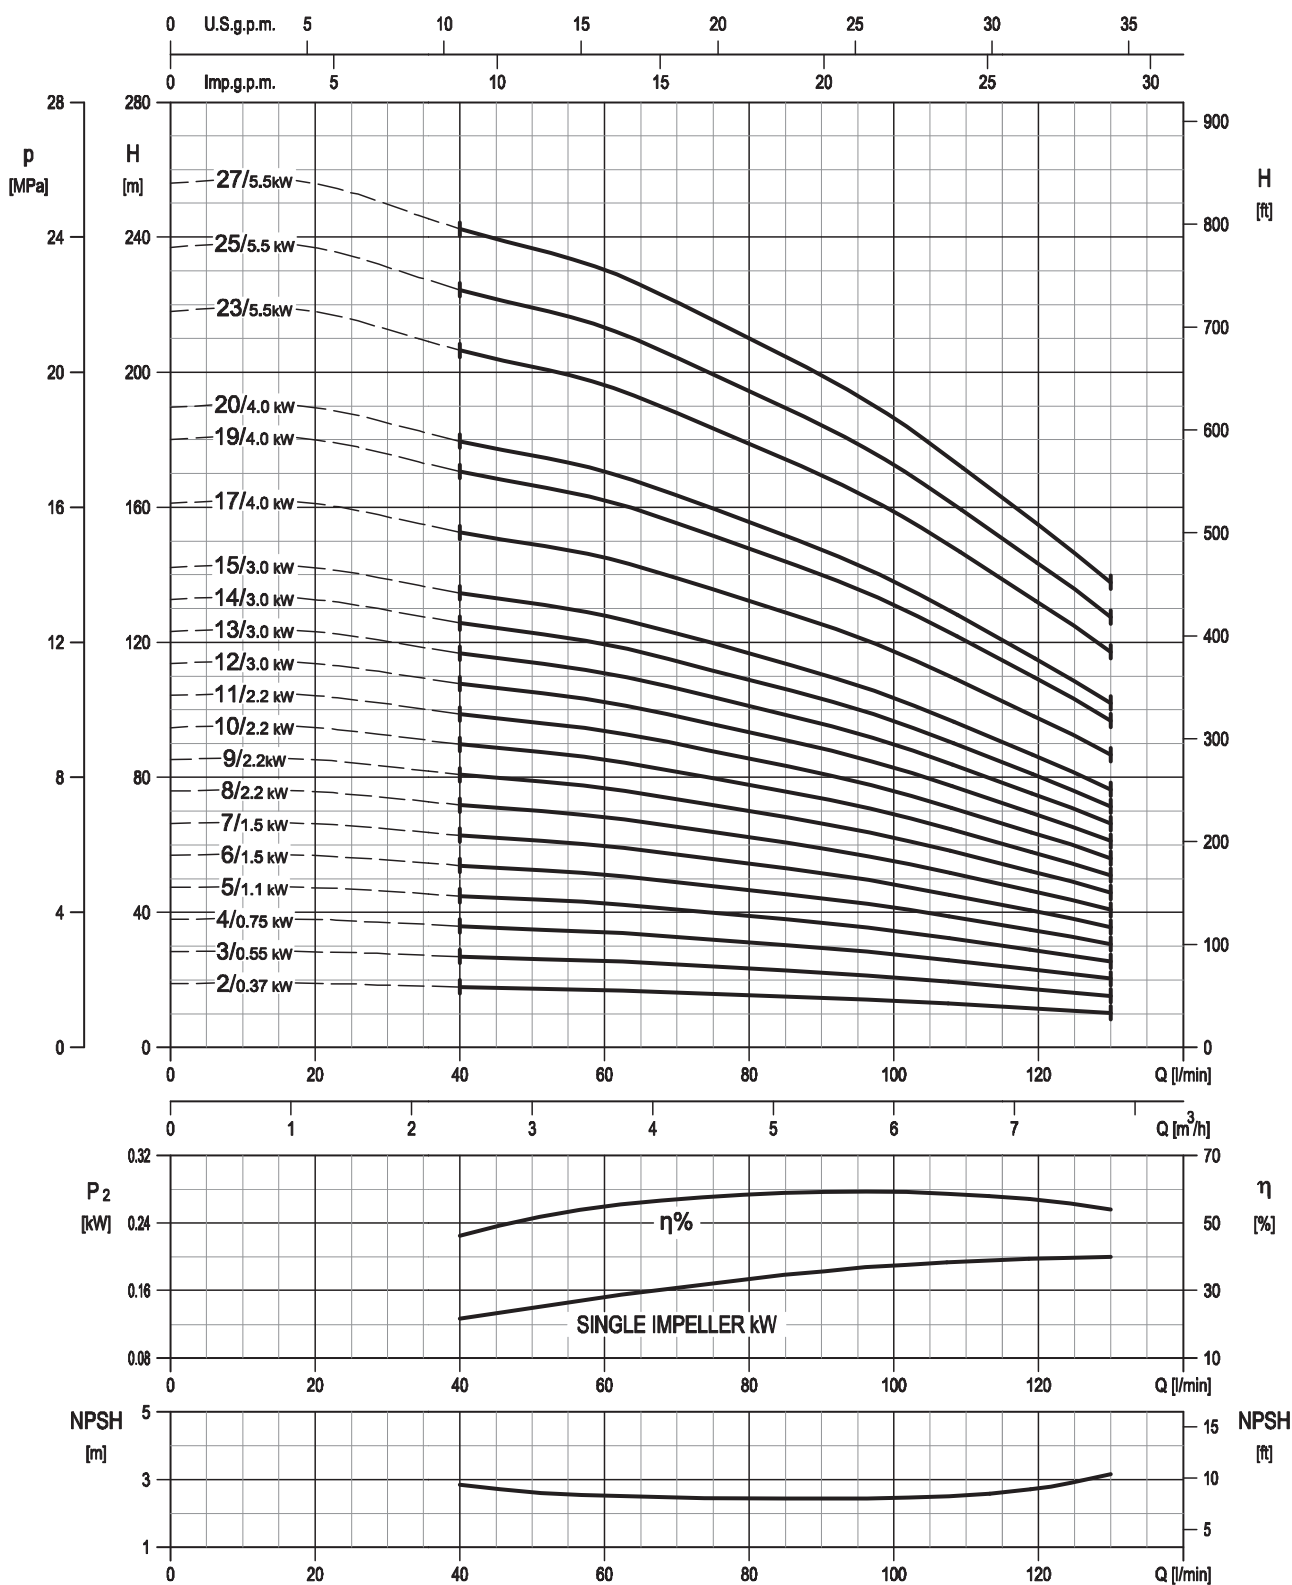

Rotation speed $\approx 2900 \text{ min}^{-1}$
Test standard: ISO 9906-Annex A

TECHNICAL DATA EVMS(L)5

Dimensional sketch

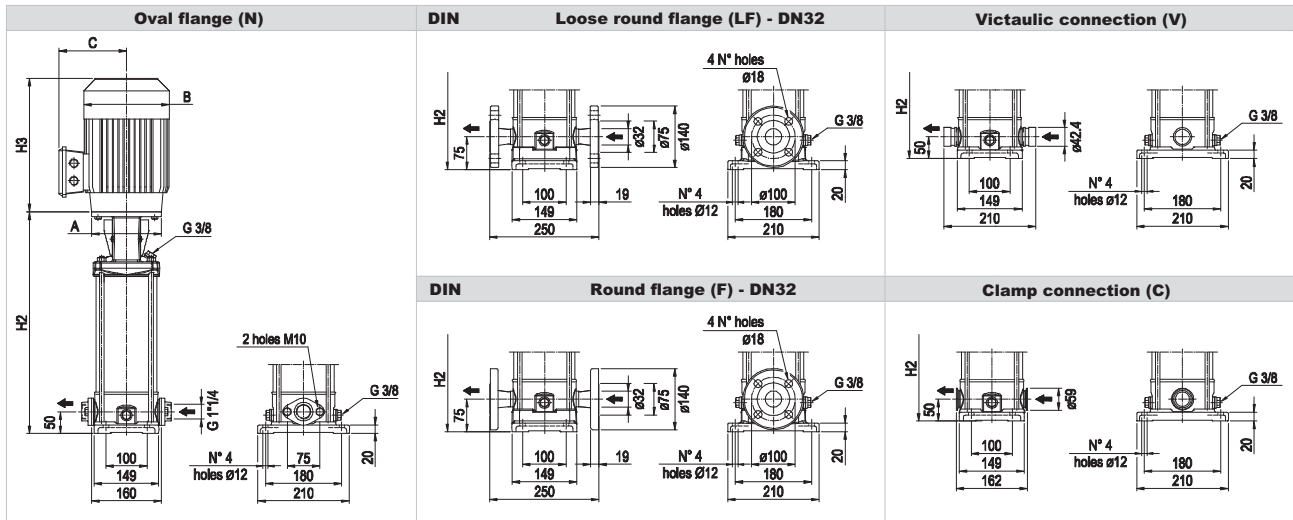

Dimensions [mm] and Weights [Kg]

Pump Type	P _{max} [MPa]	kW	Motor									Oval flange (N)			Loose round flange (LF) Round flange (F)			Victaulic connection (V) Clamp connection (C)				
			Size	A	1 ~			3 ~			H2	Weight Pump	Weight Pump + Motor	H2	Weight Pump	Weight Pump + Motor	H2	Weight Pump	Weight Pump + Motor			
					B	C	H3	B	C	H3			1 ~	3 ~			1 ~	3 ~			1 ~	3 ~
EVMS(L)5 2/0.37	1.6	0.37	71	ø105	139	133	216	142	114	215	264	9.8	16.9	15.6	289	11	18.1	16.8	264	9.9	17	15.7
EVMS(L)5 3/0.55	1.6	0.55	71	ø105	139	133	216	142	114	215	292	10.3	18.8	16.5	317	11.5	20	17.7	292	10.4	18.9	16.6
EVMS(L)5 4/0.75	1.6	0.75	80	ø120	160	151	232	160	139	232	330	11.3	22.7	20.8	355	12.5	23.9	22	330	11.4	22.8	20.9
EVMS(L)5 5/1.1	1.6	1.1	80	ø120	160	151	232	160	139	232	358	11.8	23.6	22.9	383	13	24.8	24.1	358	11.9	23.7	23
EVMS(L)5 6/1.5	1.6	1.5	90 S	ø140	172	140	278	180	148	267	396	12.7	30.5	26.7	421	13.7	31.5	27.7	396	12.6	30.4	26.6
EVMS(L)5 7/1.5	1.6	1.5	90 S	ø140	172	140	278	180	148	267	424	12.8	30.6	26.8	449	14.1	31.9	28.1	424	13	30.8	27
EVMS(L)5 8/2.2	1.6	2.2	90 L	ø140	172	140	278	180	148	267	452	13.4	32.9	29.4	477	14.6	34.1	30.6	452	13.5	33	29.5
EVMS(L)5 9/2.2	1.6	2.2	90 L	ø140	172	140	278	180	148	267	480	13.9	33.4	29.9	505	15.2	34.7	31.2	480	14.1	33.6	30.1
EVMS(L)5 10/2.2	1.6	2.2	90 L	ø140	172	140	278	180	148	267	508	14.4	33.9	30.4	533	15.6	35.1	31.6	508	14.5	34	30.5
EVMS(L)5 11/2.2	1.6	2.2	90 L	ø140	172	140	278	180	148	267	536	15.2	34.7	31.2	561	16.5	36	32.5	536	15.4	34.9	31.4
EVMS(L)5 12/3.0	1.6	3.0	100 L	ø160	-	-	-	196	155	306	574	16.7	-	39.5	599	17.7	-	40.5	574	16.6	-	39.4
EVMS(L)5 13/3.0	1.6	3.0	100 L	ø160	-	-	-	196	155	306	602	17	-	39.8	627	18.3	-	41.1	602	17.2	-	40
EVMS(L)5 14/3.0	1.6	3.0	100 L	ø160	-	-	-	196	155	306	630	17.6	-	40.4	655	18.8	-	41.6	630	17.7	-	40.5
EVMS(L)5 15/3.0	1.6	3.0	100 L	ø160	-	-	-	196	155	306	658	18.6	-	41.4	683	19.9	-	42.7	658	18.8	-	41.6
EVMS(L)5 17/4.0	1.6	4.0	112 M	ø160	-	-	-	196	155	306	714	19.3	-	45.8	739	20.6	-	47.1	714	19.5	-	46
EVMS(L)5 19/4.0	2.5	4.0	112 M	ø160	-	-	-	196	155	306	-	-	-	795	21.7	-	48.2	770	20.6	-	47.1	
EVMS(L)5 20/4.0	2.5	4.0	112 M	ø160	-	-	-	196	155	306	-	-	-	823	23.9	-	50.4	798	22.8	-	49.3	
EVMS(L)5 23/5.5	2.5	5.5	132 S	ø300	-	-	-	220	161	328	-	-	-	1001	30.6	-	69.2	976	29.5	-	68.1	
EVMS(L)5 25/5.5	2.5	5.5	132 S	ø300	-	-	-	220	161	328	-	-	-	1057	31.6	-	70.2	1032	30.5	-	69.1	
EVMS(L)5 27/5.5	2.5	5.5	132 S	ø300	-	-	-	220	161	328	-	-	-	1113	33.1	-	71.7	1088	32	-	70.6	

1.6 MPa=16 bar ; 2.5 MPa=25 bar
- not available model

VERTICAL MULTISTAGE PUMPS

GENERAL

Various regulatory authorities in many countries have introduced or are planning legislation to encourage the manufacture and use of higher efficiency motors, as part of a concerted effort worldwide to reduce energy consumption.

Indeed, the International Electrotechnical Commission (IEC) has introduced a new standards relating to energy efficient motors.

IEC 60034-30 defines new efficiency classes for motors and harmonizes the currently different requirements for induction motor efficiency levels around the world.

On 22 July 2009, **Commission Regulation (EC) N. 640/2009** implementing EcoDesign EUP Directive 2005/32/EC states that in the European Community, with the exception of some special applications, motors shall not be less efficient than the IE3 efficiency level as from 1 January 2015.

In detail:

IE3 by *January 1, 2015* (for motors ≥ 7.5 to 375 kW).

IE3 for all motors by *January 1, 2017*, (for motors from 0.75 to 375 kW).

		MOTOR EVMS		MOTOR EVM
Power Source	Frequency	50 Hz		50 Hz
	Phase	Single Phase	Three Phase	Three Phase
	Rotation speed	$\approx 2900 \text{ min}^{-1}$		$\approx 2900 \text{ min}^{-1}$
	Power rating	$0.37 \div 2.2 \text{ kW}$	$0.37 \div 18.5 \text{ kW}$	$2.2 \div 37 \text{ kW}$
		$0.5 \div 3.0 \text{ HP}$	$0.5 \div 25 \text{ HP}$	$3.0 \div 50 \text{ HP}$
Voltage	$230 \pm 10\% \text{ V}$	$230/400 \pm 10\% \text{ V}$ (up to 4kW) $400/690 \pm 10\% \text{ V}$ (above 5.5 kW)	$230/400 \pm 10\% \text{ V}$ (up to 4kW) $400/690 \pm 10\% \text{ V}$ (above 5.5 kW)	
Type	Type	Electric - TEFC		Electric - TEFC
	Efficiency Level	from 0.37 to 2.2 kW	- from 0.37 to 0.55 kW IE3 from 0.75 to 18.5 kW	IE3 from 2.2 to 37 kW
	No' of poles	2		2
	Protection degree	IP 55		IP 55
	Insulation Class	F (temperature rise class B)		F (temperature rise class B)
Others	Thermal Protection	PTC is available for the above 1.5 kW		PTC
	Casing Material	Aluminium		Aluminium
	Flange mount (IEC motor)	IM B14 (up to 4 kW) IM B5 (above 5.5 kW)		IM B14 (up to 4 kW) IM B5 (above 5.5 kW)

NOISE DATA

Motor Size	Power		Noise L _{pA} - dB(A) *
	[kW]	[HP]	
71	0.37	0.5	<70
	0.55	0.75	
80	0.75	1	<70
	1.1	1.5	
90 S	1.5	2	<70
90 L	2.2	3	
100 L	3.0	4	<70
112 M	4.0	5.5	<70
132 S	5.5	7.5	72
	7.5	10	
160 M	11	15	74
	15	20	
160 L	18.5	25	
180 M	22	30	77
200 L	30	40	78
	37	50	

VERTICAL MULTISTAGE PUMPS

TECHNICAL MOTOR DATA

Single Phase Motor at 50Hz, 2 poles

Frame size	Motor Power		Capacitor		Load efficiency and power-factor		Full load current [A]			Locked rotor current [A]		
	[kW]	[HP]	[μF]	[V]	η % 100%	cos-φ 100%	230 V			230 V		
71	0.37	0.5	16	400	57.6	0.89	3.1			9.6		
71	0.55	0.75	16	400	69.0	0.89	3.9			13.6		
80	0.75	1	25	400	65.0	0.95	5.3			28.1		
			-	-	-	-	-			-		
80	1.1	1.5	36	400	74.0	0.97	6.5			26		
			-	-	-	-	-			-		
♦ 90 S	1.5	2	35	400	79.0	0.97	8.8			46		
			-	-	-	-	-			-		
♦ 90 L	2.2	3	40	400	78.0	0.97	12.9			61		

♦ Single phase motors manufactured by EBARA

Three Phase Motor at 50Hz, 2 poles

Frame size	Motor Power		Efficiency	Load efficiency and power-factor				Full load current [A]			Locked rotor current [A]		
	[kW]	[HP]		50%	η % 75%	100%	cos-φ 100%	230 V	400V	690V	230 V	400V	690V
71	0.37	0.5	-	58.0	64.0	70.0	0.78	1.7	1	-	8.1	4.7	-
71	0.55	0.75	-	57.0	64.0	71.0	0.77	2.6	1.5	-	12.5	7.2	-
80	0.75	1	IE3	77.8	81.2	82.0	0.78	2.9	1.7	-	26.1	15.1	-
80	1.1	1.5	IE3	78.7	81.7	82.7	0.76	4.2	2.4	-	38.7	22.3	-
90 S	1.5	2	IE3	83.2	84.8	84.2	0.85	5.2	3	-	43.6	25.2	-
90 L	2.2	3	IE3	85.0	86.2	86.5	0.82	8	4.6	-	73.3	42.3	-
100 L	3.0	4	IE3	82.3	85.8	87.1	0.89	9.7	5.6	-	85.4	49.3	-
112 M	4.0	5.5	IE3	86.8	87.8	88.1	0.93	12.1	7	-	116.4	67.2	-
132 S	5.5	7.5	IE3	88.0	88.5	89.2	0.90	-	10	5.8	-	89	51.4
132 S	7.5	10	IE3	88.6	89.2	90.1	0.92	-	13.1	7.6	-	116.6	67.3
160 M	11	15	IE3	87.4	89.8	91.2	0.89	-	19.7	11.4	-	179.3	103.5
160 M	15	20	IE3	91.0	91.3	91.9	0.89	-	26.7	15.4	-	259	149.5
160 L	18.5	25	IE3	91.6	92.8	92.4	0.88	-	33	19.1	-	353.1	203.9
180 M	22	30	IE3	92.3	92.9	92.9	0.90	-	38	22	-	361	209
200 L	30	40	IE3	92.8	93.9	94.0	0.89	-	51.8	30	-	459	270
200 L	37	50	IE3	93.0	93.9	93.8	0.90	-	62.5	36	-	496	288